

☐ Order N° _____ ☐ Quotation
 Date _____ Signature _____
 Customer Ref. _____ User's weight Kg _____

PAGE 1/2
May 2024

Dealer _____

Key


☐ standard

☐ option

☐ EOS³ Fix axle

☐ EOS³ Adj axle

L Seat width ☐ 34 ☐ 36 ☐ 38 ☐ 40 ☐ 42 ☐ 44
P Seat depth ☐ 36 ☐ 38 ☐ 40 ☐ 42 ☐ 44 ☐ 46
HS Back-rest height ☐ 27 ☐ 29 ☐ 31 ☐ 33 ☐ 35 ☐ 37 ☐ 39 ☐ 41
HA Front seat/floor height ☐ 46 ☐ 48 ☐ 50
HP Rear seat/floor height ☐ 40 ☐ 42 ☐ 44 ☐ 46 ☐ 48
DP Foot-rest/seat distance ☐ 37 ☐ 39 ☐ 41 ☐ 43 ☐ 45 ☐ 47 ☐ 49 cm



EOS³
HINGED front frame
 Rigid frame in Titanium

Frame colour

☐ Shiny titanium ☐ Natural titanium

note: frame of Eos3 cannot be varnished

Backrest:

Upholstery

☐ Tension adj nylon **Seat:**
☐ Breathable tension adj ☐ Fixed (stand.)
☐ Without any backrest uph. ☐ Rigid in Carbon fibre
☐ **AMEKH** (separate order form)
☐ other seating system

Backrest upholstery colour

☐ Black
☐ Coloured (nylon).....
 colours: orange, red, green, cornflower, light blue
☐ Coloured (breath.).....
 colours: red, grey)

Tubular single titanium footplate

☐ Open ☐ Carbon fibre closed ☐ Tilt adjustable Carbon fib.closed

Pushing handles

☐ Without any pushing handles ☐ Fixed pushing handles ☐ Height adjustable pushing handles ☐ Foldable pushing handles

Distance between the hub centre and back-rest (COG)

☐ 9 cm (standard) ☐ 7 cm
☐ 0 cm (biamputated) ☐ 11 cm
☐ 3 cm ☐ 12 cm
☐ 5 cm

Backrest tilt

93° 89° 91°
☐ 89°
☐ 91° (standard)
☐ 93°

Front frame angle

☐ 83° A = 14 cm (default)
☐ 75° A = 19 cm

Rear wheel camber

☐ 1° ☐ 2° ☐ 3° ☐ 4°
☐ Quick release axles Ø12mm with 42 cambered bushes (default)
☐ Q.r.a. Ø 1/2" (12,7 mm) w/42 camb.bushes
☐ Q.r.a. Ø 1/2" (12,7 mm) w/50 camb.bushes

Revolving anti-tip device

☐ Right
☐ Left

Side-guards

☐ Aluminium with carbon fibre wing

☐ Detachable CRB wing

☐ Aluminium w/straight carbon fibre

☐ Detachable straight CRB sideguard

☐ Height adjustable from 22 to 28cm "L" arm-rest, detachable

☐ Tip-up

Elbow-rest

☐ Tubular
☐ Straight (26 cm long)
☐ Classic (23 cm long)
☐ Classic (30 cm long)

Brakes

☐ Scissor brake

☐ Composite brake

Note: the model of brake might change due to technical conflicts folding the front frame

Pockets

☐ Seat pocket

☐ Back-rest pocket


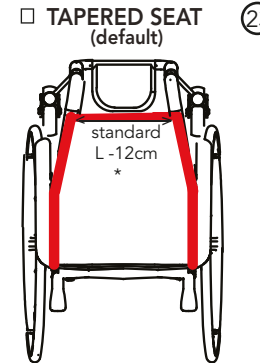
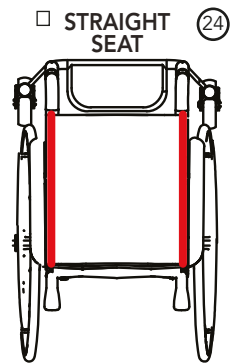
Backrest bar

☐ Standard: dia 19mm P(bar) 7,5cm; H(bar) 19cm.
☐ Custom: P(bar).....cm; H(bar).....cm.

Notes

Dealer

Rear wheels 16 ☐ 24" Ultralight (24 spokes) ☐ 24" Light (24 spokes) ☐ 24" Star 6x3 (18 spokes, silver or black) ☐ 24" (36 spokes) ☐ 24" Mountain-bike with Citybike tyre ☐ 24" Mountain-bike with Offroad tyre ☐ 24" Spinergy LX spokes colour.....(black def.) ☐ 25" Spinergy LX spokes colour.....(black def.) ☐ 25" Light (24 spokes) black Tyres ☐ Pneum. Marathon Plus ☐ Pneum. high pressure Smooth ☐ Pneum. high pressure Plugged 24" ☐ Pn.Schwalbe Right Run 24" ☐ Solid black KIK 24" not available for Ultralight wheels	Pushrims 17 ☐ Aluminium silver ☐ Aluminium dark ☐ OVAAL alum. silver 24" ☐ OVAAL alum. dark 24" ☐ OVAALG(dark w/silicon ins.)24" ☐ Chromium-plated steel ☐ Rubber coated ☐ Titanium ☐ Carbolife CURVE L ☐ CL Curve L TetraGrip ☐ CL Quadro rubber ctd ☐ Carbolife GEKKO ☐ Silicon covers OVAAL/S/G only in size 24" Only OVAAL/GEKKO available for Star6x3 OVAAL & Carbolife not available for MTB	Spoke guards 18 ☐ Transparent 24" ☐ Black 24" ☐ Fantasy code pattern (see catalogue of spokeguards)	Front castors 19 ☐ 80 (3") solid ☐ 80 (3") solid with lights ☐ 100 (4"x1.1/4) solid with plastic rim ☐ 100 (4"x1) solid with lights ☐ 100 (4"x1.1/4) solid with alum. rim ☐ 125 (5"x1.1/4) solid with plastic rim ☐ 125 (5"x1.1/4) solid with alum. rim ☐ 125 (5"x1) solid with lights
		Anodized set 20 (Rear wheel hub & rims if LIGHT 24", sideguard supports, forks and fittings) ☐ Black ☐ Silver ☐ Light blue ☐ Red ☐ Orange ☐ Cyclamen light purple	Lined cushion 21 in foam polyurethan  ☐ 3 cm high ☐ 5 cm high

 STANDARD SEAT (def.) ☐  ERGO SEAT ☐ Note: Carbon fibre rigid seat is suitable only for standard seat	Options 26 ☐ "M+F" velcro strips (hook and loop) on seat 27a ☐ "M" velcro strips (hook) on seat 27b ☐ "M" velcro strips for Vicair on seat 28 ☐ "F" velcro strips (loop) on seat 29 ☐ Catheter holder pocket 30 ☐ Pump for pneumatics 31 ☐ 45° pelvic belt 32 ☐ 45° padded pelvic belt 33 ☐ Black backpack 34 ☐ Front protective covers 35 ☐ Transport bag for EOS3 36 ☐ Bag for 2 rear wheels 24"	8,5 kg configuration (FIX) 8,8 kg configuration (ADJ) - Wheelchair 38x40x31 cm - Nylon upholstery - Titanium frame colour: Shiny Titanium - Open foot-rest - Without pushing handles - Aluminium side guards - Scissor brakes - Ultralight wheels - Smooth high press. pneum. tyres - Ultralight pushrim - 80 mm front castors - Without pockets - Max load: 100 kg
 ☐ TAPERED SEAT (default) ☒ standard L -12cm * (TAPERED seat is the default choice for any seat width starting from 36cm onwards)	 ☐ STRAIGHT SEAT ☐ (Upon request the seat can be straight. For a seat width of 34cm the STRAIGHT seat is the default choice)	

[illegible]