

Key

☐ standard


☐ option

☐ XLR8 FIX

☐ XLR8 ADJ

- L** Seat width ☐ 34 ☐ 36 ☐ 38 ☐ 40 ☐ 42 ☐ 44
P Seat depth ☐ 36 ☐ 38 ☐ 40 ☐ 42 ☐ 44 ☐ 46
HS Back-rest height ☐ 27 ☐ 29 ☐ 31 ☐ 33 ☐ 35 ☐ 37 ☐ 39 ☐ 41
HA Front seat/floor height ☐ 46 ☐ 48 ☐ 50
HP Rear seat/floor height ☐ 40 ☐ 42 ☐ 44 ☐ 46 ☐ 48
DP Foot-rest/seat distance ☐ 37 ☐ 39 ☐ 41 ☐ 43 ☐ 45 ☐ 47 ☐ 49 cm

XLR8 with adjustable axle

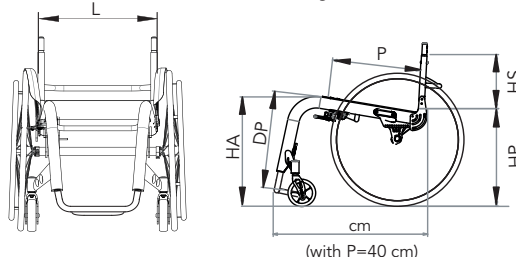

Frame colour

- ☐ Shiny alluminium ☐ Matt black
☐ (see "Colours" catalogue)
☐ Neon green ☐ Neon orange

①

Back-rest: Upholstery

- ☐ Tension adj nylon
☐ Breathable tension adj
☐ Without back-rest:
☐ **AMEKH** (separate order form)
☐ other seating system

Seat:

- ☐ Fix (stand.)
☐ Without seat
☐ Carbon fibre

②

Upholstery colour

- ☐ Black
☐ Coloured (nylon).....
 colours: orange, red, green, cornflower, light blue
☐ Coloured (breathable).....
 colours: red, dry green, grey

③

Tubular single foot-rest

④

- ☐ Open ☐ Carbon fibre closed ☐ Tilt adjustable Carbon fib.closed

Pushing handles

- ☐ Without pushing handles
☐ Fixed pushing handles
☐ Height adjustable pushing handles
☐ Foldable pushing handles

⑤

Distance between the hub centre and back-rest

⑥

- ☐ 9 cm (standard) ☐ 7 cm
☐ 0 cm (biamputated) ☐ 11 cm
☐ 3 cm ☐ 12 cm
☐ 5 cm

Back-rest tilt

⑦

- 93° 89°
 91°
☐ 89°
☐ 91° (standard)
☐ 93°

Front frame opening

⑧

- ☐ 83° = standard

Rear wheel camber

- ☐ 1° ☐ 2° ☐ 3° ☐ 4°

⑨

Revolving anti-tip device

⑩

- ☐ Right
☐ Left

Side guards

⑪

- ☐ Aluminium with carbon fibre wing ☐ Detachable with carbon f.wing
☐ Alumin. with straight carbon fibre ☐ Detachable w/straight crbn.f.

Height adjustable from 22 to 28cm "L" arm-rest, detachable

⑫

- ☐ Tip-up
☐ Fix (stand.)
Elbow-rest
☐ Tubular
☐ Straight (26 cm long)
☐ Classic (23 cm long)
☐ Classic (30 cm long)

Brakes

⑬

- ☐ Scissor brake
☐ Composite brake
☐ Standard
☐ Pull brake

Backrest

⑭

- ☐ Foldable backrest (stand.)
☐ Welded backrest

Backrest bar

⑮

- ☐ Standard: dia 19mm
 P (bar) 7,5cm;
 H (bar) 19cm.
☐ Custom: dia.....mm
 P (bar).....cm;
 H (bar).....cm.

Notes

Dealer _____

Rear wheels

16

- ☐ 24" Ultralight (24 spokes)
- ☐ 24" Light (24 spokes)
- ☐ 24" Star 6x3 (18 spokes, silver or black)
- ☐ 24" (36 spokes)
- ☐ 24" Mountain-bike with Citybike tyre
- ☐ 24" Mountain-bike with Offroad tyre
- ☐ 24" Spinergy
spokes colour.....(black stand.)
- ☐ 25" Spinergy
spokes colour.....(black stand.)
- ☐ 25" Light (24 spokes) black

Tyres

- ☐ Pneum. Marathon Plus
- ☐ Pneum. high pressure Smooth
- ☐ Pneum. high pressure Plugged 24"
- ☐ Pn.Schwalbe Right Run 24"
- ☐ Solid 24" not available for Ultralight wheels

Pushrims

17

- ☐ Aluminium silver
- ☐ Aluminium dark
- ☐ Chromium-plated steel 24"
- ☐ Rubber coated
- ☐ Titanium
- ☐ CarboLife CURVE L 24" *
- ☐ CL Curve L TetraGrip 24" *
- ☐ CL Quadro rubber ctd 24" *
- ☐ CarboLife GEKKO 24" *
- ☐ Silicon covers 24"

* not suitable for Star 6x3 and Mountainbike wheels

Spokes guards

18

- ☐ Transparent 24"
 - ☐ Black 24"
 - ☐ Fantasy
code pattern
- (see catalogue of spokeguards)

Anodized set

(Rear wheel hub & rims if LIGHT 24", sideguard supports, forks and fittings)

- ☐ Black
- ☐ Silver
- ☐ Light blue
- ☐ Red
- ☐ Orange
- ☐ Cyclamen light purple

Front castors

19

- ☐ 80 (3") solid
- ☐ 80 (3") solid with lights
- ☐ 100 (4"x1.1/4) solid with plastic rim
- ☐ 100 (4"x1) solid with lights
- ☐ 100 (4"x1.1/4) solid with alum. rim
- ☐ 125 (5"x1.1/4) solid with plastic rim
- ☐ 125 (5"x1.1/4) solid with alum. rim
- ☐ 125 (5"x1) solid with lights

- ☐ **Welded Batec fastening**

Lined cushion in foam polyurethan

22

- ☐ 3 cm high
- ☐ 5 cm high




Pockets

23



☐ Seat pocket



☐ Back-rest pocket

- ☐ Big under the seat



Options

- 25 ☐ "M+F" velcro strips (hook and loop) on seat
- 26 ☐ "M" velcro strips (hook) on seat
- 27 ☐ "F" velcro strips (loop) on seat
- 28 ☐ Padded rigid seat h 5
- 29 ☐ Chest harness
- 30 ☐ Chest belt
- 31 ☐ Abductor belt
- 32 ☐ Catheter holder pocket
- 33 ☐ Pump for pneumatics
- 34 ☐ 45° pelvic belt
- 35 ☐ 45° padded pelvic belt
- 36 ☐ Black backpack
- 37 ☐ Umbrella holder
- 38 ☐ Front protective covers

☐ **STRAIGHT SEAT**


(standard setup)

☐ **V SHAPED FRONT FRAME**




Only the tilt adjustable footplate is suitable with the "V" shaped front frame

☐ **CLOSING SEAT**



(The closing seat is upon request and is possible only if the seat width is not lower than 36cm)

☐ **STRAIGHT FRONT FRAME**



Notes _____